



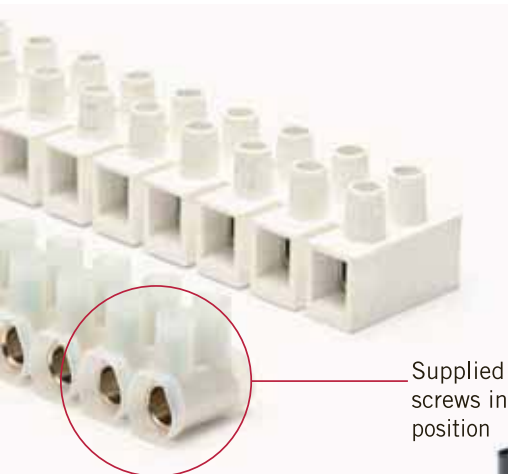
Use for electrical connections with copper conductors.

This series has been developed considering the installers' requirements and uses in new installations and maintenance works as well.

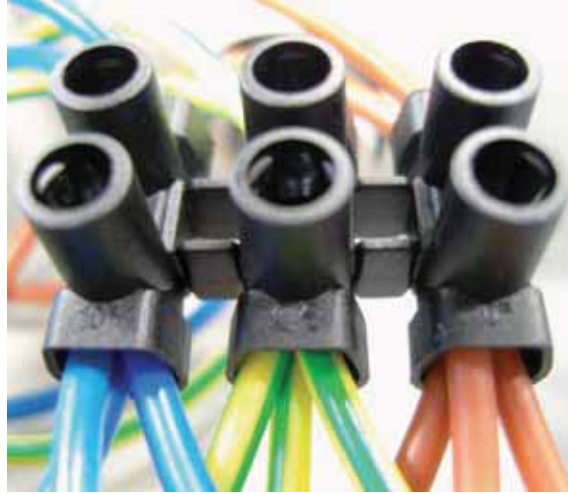

Raw materials
Moulding: Polyamide 6. Natural or black colour. V2 (according to UL94).
Insert: Nickel-plated brass.
Screws: Zinc-plated steel. Metric thread.

 Glow-wire test 960°C according to EN 60695-2-11
 Technical features according to EN 60998



No sharp shape




Supplied with screws in raised position

No remaining burrs



Extra insulation

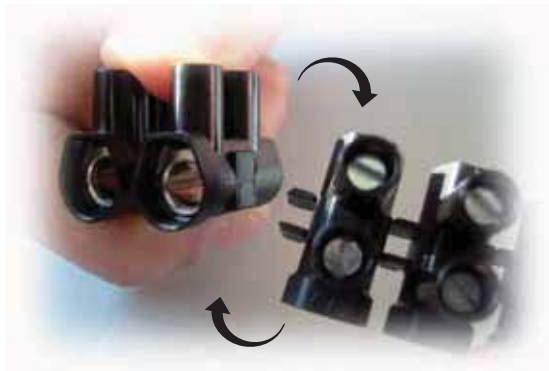


No tools needed to cut to length



Types up to 35mm²: smaller size

Bigger insert diameter for connecting more cables



Regular terminal strip



Series 100

104 ● 104 N ●			200 pcs. 375x159x97 mm		3,8 Kg
2,5 mm ² / 1 mm ²	0,4 Nm		M 2,6	12 ways	
2,5 mm ² / 1 mm ²	Voltage 450V		Current rating 24A	110°C	
106 ● 106 N ●			200 pcs. 400x160x125 mm		5,3 Kg
6 mm ² / 2,5 mm ²	0,5 Nm		M 3	12 ways	
4 mm ² / 2,5 mm ²	Voltage 450V		Current rating 41A	110°C	
110 ● 110 N ●			200 pcs. 440x185x150 mm		8,2 Kg
10 mm ² / 4 mm ²	0,8 Nm		M 3,5	12 ways	
6 mm ² / 4 mm ²	Voltage 450V		Current rating 57A	110°C	
116 ● 116 N ●			120 pcs. 360x170x165 mm		7,4 Kg
16 mm ² / 6 mm ²	1,2 Nm		M 4	12 ways	
10 mm ² / 6 mm ²	Voltage 450V		Current rating 76A	110°C	
135 ● 135 N ●			60 pcs. 369x125x212 mm		7,5 Kg
35 mm ² / 16 mm ²	2 Nm		M 5	12 ways	
25 mm ² / 16 mm ²	Voltage 450V		Current rating 125A	110°C	