



DISTRIBUTION BOXES – MOBILE
made of solid rubber or thermoplastic

Solid rubber distribution boxes – mobile

Information

Page **253**

Zirl

Page **254**

Dimensions: HxWxD = 527x400x270mm



Schrems

Page **256**

Dimensions: HxWxD = 285x405x275mm



Spitz

Page **258**

Dimensions: HxWxD = 320x320x320mm



Ried

Page **259**

Dimensions: HxWxD = 280x235x285mm



Traunsee

Page **260**

Dimensions: HxWxD = 165x260x90mm



Steyregg

Page **261**

Dimensions: HxWxD = 79x430x129mm



Distribution boxes with electricity meters

Page **262**

Distribution boxes with transformers

Page **263**

Distribution boxes special versions, examples

Page **264**

Test distribution boxes


Page **265**

Safety equipment PRCD-S

Page **266**

Universal racks and column stands

Page **267**



Solid rubber distribution boxes – mobile – Information



Solid rubber distribution boxes – mobile – Information

SOLID RUBBER HOUSINGS

Our solid rubber distributor housings are made from a mixture of natural rubber, styrene and butadiene (NK/SBR). The raw material is processed – in slab form – at pressures of up to 400 t and at a temperature of 180°C. This triggers a vulcanization process which lends the distributor its final form without affecting its consistency.

FEATURES

- unbreakable, halogen-free and aging-resistant solid rubber housing
- resistant to a diversity of oils, greases, gasoline and acids
- high mechanical strength, aging and corrosion resistant
- UV and ozone resistant
- insensitive to fountains of welding sparks and similar
- temperature resistant -30°C to + 80°C
- not flammable according to EN 60695-11-5

TYPE OF PROTECTION

IP54 (IP67 on request)


The protection degree of the complete product is defined by the unit with the lowest protection which is mounted.

STANDARD DESIGN

- enclosure with carrying handle made of solid-rubber
- entry: high-flexible rubber cable or plug
- CEE sockets i.e. protective contact sockets made of PA6 with nickel plated exchangeable contacts
- safety device material under impact resistant, opening hinged window (opening angle > 180°)
- all exposed metal parts of stainless steel. Captive screws
- numbered electrical circuits and extension sockets – fast, clear identification
- MCBs „C“ characteristics
- RCDs 30mA, over all outlets
- distributors wired to terminals (individual connection)



Solid-rubber distribution boxes – mobile Series ZIRL

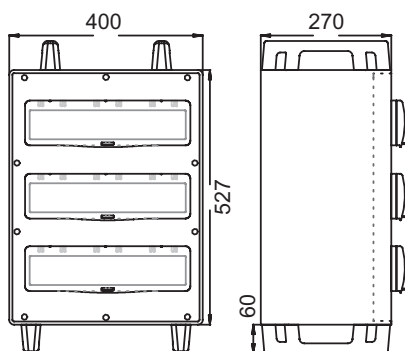

Series ZIRL

- portable solid rubber distribution box (lid: thermoplastic)
- **dimensions: HxWxD = 527x400x270mm**
- place for large equipment
- window for up to max. 3x18 modules (54 modules)
- DIN-rail mounted control units, such as MCBs, RCDs, electronic current meter etc. in a robust plastic cover installed on the back
- ready wired for using
- housing protection IP54 (IP67 on request)
- stockable for saving storage
- **general information see page 253!**



1 CEE-socket 125A 5p 400V
2 CEE-sockets 63A 5p 400V
2 CEE-sockets 32A 5p 400V
2 CEE-sockets 16A 5p 400V

4 CEE-sockets 16A 3p 230V
4 sockets (DIN 49440) 16A 250V

unprotected (not over RCD)

2 MCBs 63A 3p-C 2 RCDs 63/4/0,03A
2 MCBs 32A 3p-C 1 RCD 63/4/0,03A
2 MCBs 16A 3p-C 1 RCD 63/4/0,03A

4 MCBs 16A 1p-C } 1 RCD 63/4/0,03A (pre-fused
4 MCBs 16A 1p-C } over Neozed D02 63A)

9545 . . .

Series ZIRL

- design with frame
- dimensions: HxWxD = 527x400x270mm

4 CEE-Sockets 63A 5p 400V

4 Neozed D02 63A 3p

2m cable with CEE-plug 125A 5p 400V

9545 . . .



References and special designs available on request!

Solid-rubber distribution boxes – mobile Series ZIRL Special versions – examples

Series Zirl with 6x125A and NH isolator

- with two handles, with 2 crane eyelets mounted on a galvanized sub-frame
- ready wired on CU-rail system
- **HxWxD = 1500x900x600mm**

Fittings:
6 CEE-sockets 125A 5p 400V

6 NH-fuses

4xM40 cable glands on the bottom

92293 . . .



Series Zirl can be blocked when inserted

- with two handles, mounted on a galvanized sub-frame, with 2 transparent and lockable doors
- **HxWxD = 830x1100x600mm**

Fittings:
1 CEE-Sockets 32A 5p 400V
4 CEE-Sockets 16A 5p 400v
3 sockets (DIN 49440) 16A 250V
1 electric rotary current counter

3 MCBs 32A 1p-C 1 RCD 40/4/0,03A
12 MCBs 16A 1p-C 4 RCDs 40/4/0,03A
3 RCDs/MCBs 16A 0,03 C

2m cable with CEE-plug 63A 5p 400V

92292 . . .



Series Zirl as terminal box up to 240mm²

- with thermoplastic swing doors , with CU-rail system up to 240 mm²
- entry and outlet: cable entry Ø 46mm
- **HxWxD = 800x527x270mm**

92292 . . .





References and special designs available on request!



Solid-rubber distribution boxes – mobile Series SCHREMS



- portable solid-rubber distribution box
- **Dimensions: HxWxD = 255x400x300mm**
- big size for many items
- window for up to 36 modules
- fuses, control devices e.g. MCB, RCD,... current indication under cover
- ready wired for connection
- housing protection IP54 (IP67 on request)
- stockable for saving storage
- **general information see page 253!**

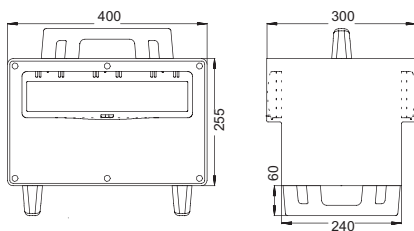


1 CEE-socket 63A 5p 400V
1 CEE-socket 63A 5p 400V
2 CEE-sockets 32A 5p 400V
2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440) 16A 250V

1 CEE-plug 63A 5p 400V

9504532

Protection:

without fuse
1 MCB 63A 3p-C
2 MCBs 32A 3p-C
2 MCBs 16A 3p-C
4 MCBs 16A 1p-C
1 RCD 63/4/0,03A
(out of 1xCEE 63A 5p)




2 CEE-sockets 32A 5p 400V
2 CEE-sockets 16A 5p 400V
9 sockets (DIN 49440) 16A 250V

2m cable 5G16 with
CEE-plug 63A 5p 400V

9504450

Protection:

2 MCBs 32A 3p-C
2 MCBs 16A 3p-C
9 MCBs 16A 1p-C
1 RCD 63/4/0,03A



2 CEE-sockets 63A 5p 400V
2 CEE-sockets 32A 5p 400V

2m cable 5G35 with
CEE-plug 125A 5p 400V

9504300



Protection:

2 D02 63A 3p
2 MCBs 32A 3p-C
2 RCDs 63/4/0,03A on CEE 63A 5p
1 RCD 63/4/0,03A on CEE 32A 5p
back-up fuse in the form of Neozed 63A
for CEE 32A 5p

Special designs - available on request!

Solid-rubber distribution boxes – mobile Series SCHREMS

- portable solid-rubber distribution box
- **Dimensions: HxWxD = 255x400x300mm**
- big size for many items
- window for up to 36 modules
- fuses, control devices e.g. MCB, RCD,... current indication under cover
- ready wired for connection
- housing protection IP54 (IP67 on request)
- stockable for saving storage
- **general information see page 253!**

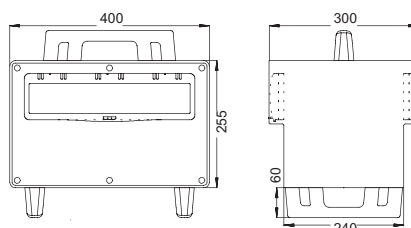


1 CEE-socket 32A 5p 400V
2 CEE-sockets 16A 5p 400V
3 CEE-sockets 16A 3p 230V
3 sockets (DIN 49440) 16A 250V

2m H07RN-F 5G16 with
CEE-plug 63A 5p 400V

9504560

Protection:

1 MCB 32A 3p-C
1 MCB 16A 3p-C
3 MCB 16A 1p-C
3 MCB 16A 1p-C
1 RCD 63/4/0,03A

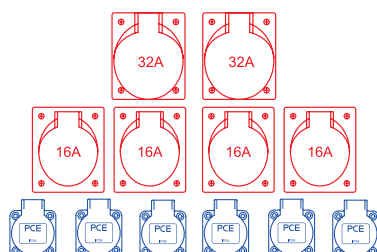


2 CEE-sockets 32A 5p 400V
4 CEE-sockets 16A 5p 400V
6 sockets (DIN 49440) 16A 250V

2m H07RN-F 5G16 with
CEE-plug 63A 5p 400V

9504540

Protection:

1 MCB 32A 3p-C
2 MCB 16A 3p-C
3 MCB 16A 1p-B
1 RCD 63/4/0,03A

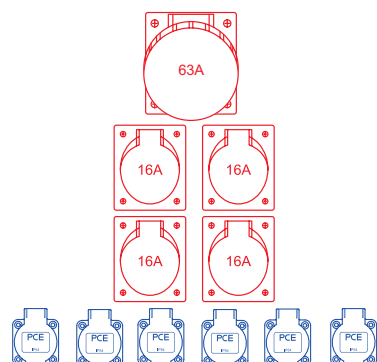

1 CEE-socket 63A 5p 400V
4 CEE-sockets 16A 5p 400V
6 sockets (DIN 49440) 16A 250V

2m H07RN-F 5G16 with
CEE-plug 63A 5p 400V

9504730


Protection:

without fuse
2 MCB 16A 3p-C
6 MCB 16A 1p-C
1 RCD 63/4/0,03A



Solid-rubber distribution boxes – mobile

Series SPITZ with fuse

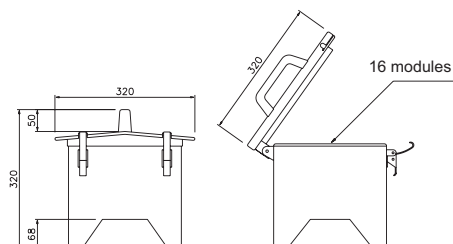

- portable, handy solid-rubber distribution box
- **dimensions: HxWxD = 320x320x320 mm**
- lifting hinged cover with 2 quick acting closures
- fuses, control devices e.g. MCB, RCD, current indicator, ... under cover
- maximum safety - closed casing bottom with high ground clearance, prevention of water intake from bottom
- sockets protected by overhanging box cover
- space-saving storage - distributors are stackable
- housing protection IP54 (IP67 on request)
- approved according to EN 60439/4
- **general information see page 253!**



10 sockets (DIN 49440)
16A 250V

10 MCBs 16A 1p-B
1 RCD 63/4/0,03A

2m H07RN-F 5G6 with
CEE-plug 32A 5p 400V

9474144

2 CEE-sockets 16A 5p 400V
6 sockets (DIN 49440)
16A 250V

1 MCB 16A 3p-C
3 MCBs 16A 1p-B
1 RCD 63/4/0,03A

2m H07RN-F 5G6 with
CEE-plug 32A 5p 400V

9474154

1 CEE-socket 32A 5p 400V
2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

2 MCBs 16A 3p-C
4 MCBs 16A 1p-B
1 RCD 63/4/0,03A

2m H07RN-F 5G6 with
CEE-plug 32A 5p 400V

9474584

1 CEE-socket 32A 5p 400V
2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

2 Neozed D01 3p
2 Neozed D01 1p

CEE-plug 32A 5p 400V

9474203

8 sockets (DIN 49440)
16A 250V

4 Neozed D01 1p

CEE-plug 32A 5p 400V

9474027

1 CEE-socket 32A 5p 400V
2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

1 Neozed D01 3p
2 Neozed D01 1p
1 RCD 63/4/0,03A

CEE-plug 32A 5p 400V

9474586

3 CEE-sockets 32A 5p 400V
4 sockets (DIN 49440)
16A 250V

3 MCBs 32A 3p-C
2 MCBs 16A 1p-B
1 RCD 63/4/0,03A

2m H07RN-F 5G10 with
CEE-plug 63A 5p 400V

9474320

2 CEE-sockets 32A 5p 400V
2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

2 MCBs 16A 3p-C
4 MCBs 16A 1p-B
1 RCD 63/4/0,03A

2m H07RN-F 5G6 with
CEE-plug 32A 5p 400V

9474590

2 CEE-sockets 32A 5p 400V
2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

2 MCBs 32A 3p-C
1 MCB 16A 3p-C
2 MCBs 16A 1p-B
1 RCD 63/4/0,03A

2m H07RN-F 5G10 with
CEE-plug 63A 5p 400V



9474592

Special designs - available on request!

Solid-rubber distribution boxes – mobile Series RIED

- portable, handy solid-rubber distribution box, ready wired for connection
- dimensions: HxWxD = 280x235x285 mm**
- maximum rated current of 32A
- lifting hinged cover with 2 quick acting closures
- fuses, control devices e.g. MCB, RCD, current indicator, ... under cover
- maximum safety - closed casing bottom with high ground clearance, prevention of water intake from bottom
- sockets protected by overhanging box cover
- space-saving storage - distributors are stackable
- housing protection IP54
- Entry: flanged plug or cable
- general information see page 253!**

IP54 T  

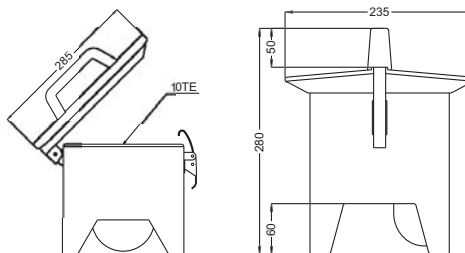


2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

1 MCB 16A 3p-C
2 MCBs 16A 1p-C
1 RCD 63/4/0,03A

2m cable H07RN-F 5G6 with
CEE-plug 32A 5p 400V

9473012




2 CEE-sockets 16A 5p 400V
without fuse
4 sockets (DIN 49440)
16A 250V

2 MCBs 16A 1p-C
1 RCD 40/4/0,03A

2m cable H07RN-F 5G2,5 with
CEE-plug 16A 5p 400V

9473070




2 CEE-sockets 16A 5p 400V
without fuse
4 sockets (DIN 49440)
16A 250V

2 MCBs 16A 1p-C
1 RCD 40/4/0,03A

CEE-plug
16A 5p 400V

9473071




10 sockets (DIN 49440)
16A 250V

1 RCD 40/4/0,03A

2m cable H07RN-F 5G2,5
with CEE-plug
16A 5p 400V

9473219




8 sockets (DIN 49440)
16A 250V

1 RCD 40/4/0,03A

CEE plug 16A 5p 400V

9473274




1 CEE-socket 32A 5p 400V
without fuse
2 CEE-sockets 16A 5p 400V
3 sockets (DIN 49440)
16A 250V

1 MCB 16A 3p-C
3 MCBs 16A 1p-C
1 RCD 63/4/0,03A

CEE-plug 32A 5p 400V

9473377




2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

1 MCB 16A 3p-C
2 MCBs 16A 1p-C
1 RCD 63/4/0,03A

CEE plug 32A 5p 400V

9473435




6 sockets (DIN 49440)
16A 250V

6 MCBs 16A 1p-C

2m cable H07RN-F 5G6 with
CEE-plug 32A 5p 400V

9473487



1 CEE-socket 32A 5p 400V
2 CEE-sockets 16A 5p 400V
3 sockets (DIN 49440)
16A 250V

1 MCB 16A 3p-C
3 MCBs 16A 1p-C
1 RCD 63/4/0,03A

2m cable H07RN-F 5G6 with
CEE-plug 32A 5p 400V


9473371



Solid-rubber distribution boxes – mobile Series TRAUNSEE



- portable, handy solid-rubber distribution box
- **dimensions: HxWxD = 165x260x90mm**
- available with and without fuse
- ready wired for connection
- housing protection IP54 (IP67 on request)
- entry: high-flexible rubber cable
- **general information see page 253!**

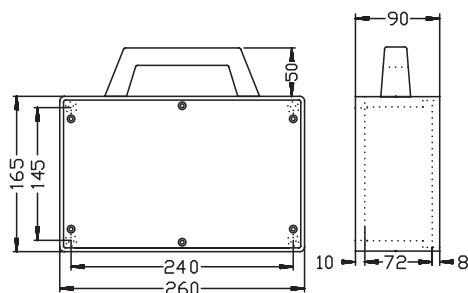

4 sockets (DIN 49440) 16A 250V

without fuse



1,5m cable 3G2,5 with
solid rubber plug 16A 250V

9216011

3 sockets (DIN 49440) 16A 250V

1 RCD 25/2/0,03A



1,5m cable 3G2,5 with rubber plug
16A 2p+E 230V

9216066

1 CEE-socket 16A 5p 400V
2 sockets (DIN 49440) 16A 250V

without fuse



1,5m cable 5G2,5 with
CEE-plug 16A 5p 400V

9216051

1 CEE-socket 16A 5p 400V
2 sockets (DIN 49440) 16A 250V

1 RCD 25/2/0,03A for the 2 safety sockets




1,5m cable 5G2,5 with
CEE-plug 16A 5p 400V

9216052

Solid-rubber distribution boxes – mobile Series STEYREGG

- portable, handy solid-rubber distribution box
- **dimensions:** HxWxD = 79x430x129 mm
- available with and without fuse
- ready wired for connection
- housing protection IP54
- **general information see page 253!**

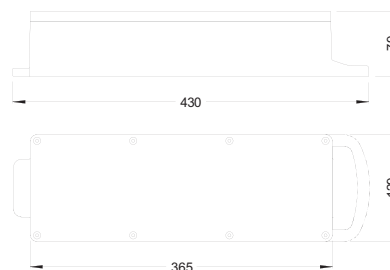


4 sockets (DIN 49440) 16A 250V

without fuse

2m cable 3G2,5 with
rubber-plug 16A 250V

9441010




1 CEE-socket 16A 5p 400V
3 sockets (DIN 49440) 16A 250V

without fuse

2m cable 5G2,5 with
CEE-plug 16A 5p 400V

9441050




3 CEE-sockets 16A 5p 400V

without fuse

2m cable 5G2,5 with
CEE-plug 16A 5p 400V

9441070




1 CEE-socket 16A 5p 400V
3 sockets (DIN 49440) 16A 250V

1 RCD-40/4/0,03A

2m cable 5G2,5 with
CEE-plug 16A 5p 400V

9441051




2 CEE-sockets 16A 5p 400V
2 sockets (DIN 49440) 16A 250V

1 RCD-40/4/0,03A - all outlets

2m cable 5G2,5 with
CEE-plug 16A 5p 400V

9441065



2 CEE-sockets 32A 5p 400V
2 sockets (DIN 49440) 32A 250V

2 MCBs 16A 1p
1 RCD-63A/4/0,03A

2m cable 5G4 with
CEE-plug 32A 5p 400V

9441075



Solid-rubber distribution boxes – mobile with electricity meters



Traunsee

Series TRAUNSEE

9216150

- Entry:** 5m cable 3G1,5 with socket (DIN 49440) 16A 250V
- Outlet:** 2 sockets (DIN 49440) 16A 250V 1 x RCBO 16/1+N/0,03A
1 electronic kWh AC electricity meter 230V



Spitz

Series SPITZ

9474162

Hinged covers with 2 quick-release fasteners, can be secured with a padlock

- Entry:** 2m cable 3G2,5 with rubber plug 16A 250V
- Outlet:** 4 sockets (DIN 49440) 16A 250V 4 x MCBs 16A 1p-B
1 x RCD 25/2/0,03A
1 electronic kWh AC electricity meter 230V

Series SPITZ

9474164

Hinged covers with 2 quick-release fasteners, can be secured with a padlock

- Entry:** 2m cable 5G2,5 with CEE-plug 16A 5p 400V
- Outlet:** 1 CEE-socket 16A 5p 400V without fuse
4 sockets (DIN 49440) 16A 250V 4 x MCBs 16A 1p-B
1 x RCD 40/4/0,03A
1 electronic kWh AC electricity meter 3 x 230/400V

Series SPITZ

9474166

Hinged covers with 2 quick-release fasteners, can be secured with a padlock

- Entry:** 2m cable 5G2,5 with CEE-plug 16A 5p 400V
- Outlet:** 2 CEE-sockets 16A 5p 400V 1 x MCB 16A 3p-C
4 sockets (DIN 49440) 16A 250V 2 x MCBs 16A 1p-B
1 x RCD 40/4/0,03A
1 electronic kWh AC electricity meter 3 x 230/400V



Spitz

Series SPITZ

9474540

Hinged covers with 2 quick-release fasteners, can be secured with a padlock

- Entry:** 2m cable 5G6 with CEE-plug 32A 5p 400V
- Outlet:** 1 CEE-socket 32A 5p 400V without fuse
2 CEE-sockets 16A 5p 400V 1 x MCB 16A 3p-C
3 sockets (DIN 49440) 16A 250V 3 x MCBs 16A 1p-B
1 x RCD 63/4/0,03A
1 electronic kWh AC electricity meter 3 x 230/400V

Series SPITZ

9474176

Hinged covers with 2 quick-release fasteners, can be secured with a padlock

- Entry:** 2m cable 5G2,5 with CEE-plug 16A 5p 400V
- Outlet:** 3 CEE-sockets 16A 5p 400V 4 x MCBs 16A 1p-B
4 sockets (DIN 49440) 16A 250V 1 x RCD 40/4/0,03A
1 electronic kWh AC electricity meter 3 x 230/400V

Series SCHREMS

9504524

- Entry:** CEE-plug 32A 5p 400V
- Outlet:** 1 CEE-socket 32A 5p 400V without fuse
2 CEE-sockets 16A 5p 400V 1 x MCB 16A 3p-C
6 sockets (DIN 49440) 16A 250V 3 x MCBs 16A 1p-B
1 RCD 63/4/0,03A
1 electronic kWh AC electricity meter 3 x 230/400V

Series SCHREMS

9504528

- Entry:** 2m cable 5G6 with CEE-plug 32A 5p 400V
- Outlet:** 1 CEE-socket 32A 5p 400V without fuse
2 CEE-sockets 16A 5p 400V 1 x MCB 16A 3p-C
6 sockets (DIN 49440) 16A 250V 3 x MCBs 16A 1p-B
1 RCD 63/4/0,03A
1 electronic kWh AC electricity meter 3 x 230/400V



Special designs - available on request!

Solid-rubber distribution boxes – mobile

with isolation transformers with secondary-side extra low voltage
230/24V~ or 230/42V~ according to EN61558-2-6 (VDE 0570 part 2-6)

Safety at the workplace


Safety and isolation transformers are often absolutely necessary to protect human health. Special electrical products, which provide maximum protection for the user, are required at many workstations.

Series TRAUNSEE

Isolation transformer 500VA 230/24V~

Entry: 3m cable 2G1,5 with contour plug 16A 250V~
Outlet: 2 CEE-sockets 16A 2p 24V~

9216452




Series TRAUNSEE

Isolation transformer 500VA 230/42V~

Entry: 3m cable 2G1,5 with contour plug 16A 250V~
Outlet: 2 CEE-sockets 16A 2p 42V~

9216451




Series RIED

Isolation transformer 500VA 230/24V~

Entry: 3m cable 2G1,5 with contour plug 16A 250V~
Outlet: 4 CEE-sockets 16A 2p 24V~

9473400




Series RIED

Isolation transformer 500VA 230/42V~

Entry: 3m cable 2G1,5 with contour plug 16A 250V~
Outlet: 4 CEE-sockets 16A 2p 42V~

9473401




Series SPITZ

Isolation transformer 1000VA 230/24V~

Entry: 3m cable 2G1,5 with contour plug 16A 250V~
Outlet: 4 CEE-sockets 16A 2p 24V~

94742409




Series SPITZ

Isolation transformer 1000VA 230/42V~


Entry: 3m cable 2G1,5 with contour plug 16A 250V~
Outlet: 4 CEE-sockets 16A 2p 42V~

94741409



Solid-rubber distribution boxes – mobile

with isolation transformers with secondary-side extra low voltage
230/24V~ or 230/42V~ according to EN61558-2-6 (VDE 0570 part 2-6)



24V~


Series SCHREMS

Isolation transformer 2000VA 230/24V~

9502421

Entry: 3m cable 2G1,5 with contour plug 16A 250V~

Outlet: 6 CEE-sockets 16A 2p 24V~



42V~


Series SCHREMS

Isolation transformer 2000VA 230/42V~

9502442

Entry: 3m cable 2G2,5 with contour plug 16A 250V~

Outlet: 6 CEE-sockets 16A 2p 42V~



24V~


Series SCHREMS

Isolation transformer 2500VA 230/24V~

9502422

Entry: 3m cable 2G2,5 with contour plug 16A 250V~

Outlet: 6 CEE-sockets 16A 2p 24V~



42V~

Series SCHREMS

Isolation transformer 2500VA 230/42V~

9502443

Entry: 3m cable 2G2,5 with contour plug 16A 250V~

Outlet: 6 CEE-sockets 16A 2p 42V~

Solid-rubber distribution boxes - mobile

with isolation transformer with galvanic isolation 230/230V~
according to EN61558-2-4 (VDE 0570 part 2-4)



Series TRAUNSEE

Isolation transformer 500VA 230/230V~

9216453

Entry: 3m cable 2G1,5 with contour plug 16A 250V~

Outlet: 1 socket (DIN 49440) 16A 250V~



Series SPITZ

Isolation transformer 1000VA 230/230V~

9474410

Entry: 3m cable 2G1,5 with contour plug 16A 250V~

Outlet: 1 socket (DIN 49440) 16A 250V~



Series SCHREMS

Isolation transformer 2000VA 230/230V~

9502413

Entry: 3m cable 2G1,5 with contour plug 16A 250V~

Outlet: 1 socket (DIN 49440) 16A 250V~



Series SCHREMS

Isolation transformer 2500VA 230/230V~

9502419

Entry: 3m cable 2G2,5 with contour plug 16A 250V~

Outlet: 1 socket (DIN 49440) 16A 250V~

Special designs - available on request!

Special versions – examples

Solid-rubber distribution boxes – mobile

Solid rubber 2-way distributor combination

Series BRUCK

with 2 crane eyelets size M12 mounted on a galvanized sub-frame

HxWxD = 700x370x450mm

Fittings: 4 CEE-sockets 63A 5p 400V 2 MCBs 63A 3p-C
2 RCD 63/4/0,03A

2m cable 5G35 with CEE-plug 125A 5p 400V



Solid rubber distribution box

Series ZIRL

with two handles, on a steel sub-frame, galvanized in black, stackable, locked using a padlock on Neozed window

HxWxD = 650x520x270mm

Fittings: 4 electronic kWh three-phase meters 3 x 230/400V AC 4 CEE-sockets 32A 5p 400V-distributor bottom 4 Neozed 32A 3p
1 RCD 40/4/0,03A
3 sockets (DIN 49440) 3 MCBs 16A 1p-C
1 RCD 40/4/0,03A

4m cable 5G16 with CEE-plug 63A 5p 400V



Solid rubber distribution box

Series ZIRL with two separate circuits

on transport trolley made of angel irons, galvanized, with 2 guide rollers and 2 fixed rollers, solid rubber tyres

HxWxD = 610x520x270mm

Fittings: 4 CEE-sockets 63A 5p 400V 4 switch-disconnectors 63A 3p-C acting as back-up fuse
4 RCDs 63/4/0,03A

2 CEE-plug 125A 5p 400V



Solid rubber 2-way distributor combination

Series COMBI of 2 ZIRL

on transport trolley made of angel irons, galvanized, with 2 guide rollers and 2 fixed rollers, solid rubber tyres

HxWxD = 610x800x270mm

Fittings: 3 control lamps to monitor the input 2 CEE-sockets 63A 5p 400V 2 MCBs 63A 3p-C 2 RCDs 63/4/0,1A on CEE-sockets 63A
3 CEE-sockets 32A 5p 400V 3 MCBs 32A 3p-C 1 RCD 63/4/0,03A on CEE-sockets 32A
6 CEE-sockets 16A 5p 400V 6 MCBs 16A 3p-C 1 RCD 63/4/0,03A on CEE-sockets 16A
9 sockets (DIN 49440) 16A 240V 9 MCBs 16A 1p-C 1 RCD 40/4/0,03A back-up fuse in the form of a RCD earthed contact socket

1 CEE-plug 125A 5p 400V



Solid rubber 2-way distributor combination

Series COMBI of 2 ZIRL

with 2 crane eyelets size M12 mounted on a galvanized sub-frame

HxWxD = 700x1100x600mm

Fittings: 2 CEE-sockets 63A 5p 400V 2 MCB 63A 3p-C 2 RCDs 63/4/0,3A on CEE-socket 63A
6 CEE-sockets 32A 5p 400V 6 MCBs 32A 3p-C 3 RCDs 63/4/0,03A on CEE-sockets 32A
2 CEE-sockets 16A 5p 400V 2 MCBs 16A 3p-C 1 RCDs 40/4/0,03A on CEE-sockets 16A
6 sockets (DIN 49440) 16A 240V 6 MCB 16A 1p-C 1 RCD 40/4/0,03A on socket (DIN 49440)

2m cable with CEE-plug 63A 5p 400V



Circuit breakers that provide excellent PRCD-S protection against injury



Residual current circuit breaker PRCD-S

- comprehensive personal security for construction sites
- enables the safe extraction of power from existing outlets
- checked for proper functioning outlets – particularly earth conductor - and allows the extraction of power only of secure sockets
- serve as mobile residual current device (RCD)
- is simply inserted as an extension cable between the consumer and outlet
- PRCD-S has the following features:
residual current device (RCD) – earth conductor identification (inspection of function before operation) – earth conductor monitoring (inspection during operation) – identification of external voltage – identification of low tension

2p+E, 16A, 30mA, IP55, rubber-housing

96200015



9620664

Safety extension cord

3m 3G1,5 with residual current circuit breaker 16A 250V~ 30mA IP44
with assembled solid rubber plug and solid rubber connector 16A 250V~

9620664



9620684

Safety extension cord

3m 3G1,5 with residual current circuit breaker 16A 250V~ 30mA IP44
with assembled solid rubber plug and solid rubber 3-way connector 16A 250V~

9620684

Safety extension cord

3m 3G2,5 with residual current circuit breaker 16A 250V~ 30mA IP44
with assembled CEE plug and CEE connector 16A 3p 230V~

9620665



Safety extension cord

3m 3G1,5 with residual current circuit breaker 16A 250V~ 30mA IP44
with assembled solid rubber plug and compact distribution box Series St. Anton
3 x sockets (DIN 49440) 16A 250V~

9620694

Safety extension cord

3m 3G2,5 with residual current circuit breaker 16A 250V~ 30mA IP44
with assembled solid rubber plug and compact distribution box Series St. Anton
3 x sockets (DIN 49440) 16A 250V~

9620695



Solid rubber distribution boxes Series TRAUNSEE with handle

Entry: 3m cable 3G2,5 with rubber plug 16A 250V~
and with residual current circuit breaker 16A 250V~ 30mA IP44
Outlet: 4 sockets (DIN 49440) 16A 250V~

9620676

Solid rubber distribution boxes Series TRAUNSEE with handle

Entry: 3m cable 3G2,5 with CEE-plug 16A 3p 230V~
and with residual current circuit breaker 16A 250V~ 30mA IP44
Outlet: 2 CEE-sockets 16A 3p 230V~

9620677



Solid rubber distribution boxes Series RIED with handle

Entry: 2m cable 5G2,5 with plug 16A 5p 400V~
and with residual current circuit breaker 5p 230/400V IP44
Outlet: 1 CEE-socket 16A 5p 400V~
3 sockets (DIN 49440) 16A 250V~

9473814

Special designs - available on request!

Universal racks and power column stands

Universal rack

- solid welded frame, with ergonomic handle
- hinged reel
- mounting holes predrilled for individual distribution boxes for self-installation
- prepared for different sizes of distribution boxes series ANIF, FURT, LOFER, SALZBURG, GREIN, MURAU and SCHWAZ

598053



Column stand 1200mm

- made of hot-galvanized sheet steel with base mounting plate
- **HxWxD = 1206x400x243mm**
- square column 80x80mm
- base plate 400x400mm
- prepared for distribution box series SALZBURG
- construction in stainless steel on request

410726



Column stand 1200mm

- made of hot-galvanized sheet steel with base mounting plate
- **HxWxD = 1206x500x243mm**
- square column 80x80mm
- base plate 400x400mm
- prepared for distribution box series BRUCK
- construction in stainless steel on request

410725



Power column stand Typ 340

- made of stainless steel sheet metal with base mounting plate
- **HxWxD = 1100x340x260mm**
- for distribution boxes up to WxH = 320x520mm
- finished in stainless sheet steel, powder-coated in RAL 2011 (orange) on request

410998



Thermoplastic distribution boxes – mobile

Information

Page **269**

Anif4

Page **270**

Dimensions: HxWxD = 320x222x114mm



Murau

Page **270**

Dimensions: HxWxD = 189x290x114mm



Schwaz

Page **270**

Dimensions: HxWxD = 189x290x114mm



Horn

Page **271**

Dimensions: HxWxD = 263x246x75mm



Imst

Page **272**

Dimensions: HxWxD = 197x200x197mm



Pegasus

Page **274**

Dimensions: HxWxD = 230x140x140mm



St. Anton

Compact distribution boxes

Page **276**



T-Box

Page **278**

M-Box

Page **279**

Thermoplastic distribution boxes – mobile – Information

Mobile thermoplastic distribution boxes are suitable for **in- and outdoor areas**. The boxes are available in **different sizes and designs**.

Protection degree: IP44, IP54 and IP66/67

The massive and high-quality **enclosure made from PC/ABS** tested and certified according to IEC/EN 62208* provides a wide range of **positive features**. Such as high impact resistance and notched bar impact strength, high thermal stability, dielectric strength, weather, UV and wear resistance, good insulation properties, and resistance against many chemicals. The material used is free from cadmium, red phosphor and halogens (fluorine, chlorine, bromine, iodine and astatine).

Mobile thermoplastic distribution boxes are well suited for all applications. Especially in those areas that depend on high-quality, a robust enclosure and total reliability, such as in industry, trade, workshops, agriculture, household, public buildings, leisure, sport, marinas, camping, etc.

Adjusted to your needs we put together individually tailored and **optimally equipped wall distribution boxes**.




Thermoplastic insulated distribution boxes – mobile

Series ANIF4 / SCHWAZ / MURAU




Series ANIF4

- compact design
- high-quality thermoplastic material
- **dimensions: HxWxD = 320x222x114mm**
- 10 modules
- ready wired for connection
- IP54 splashproof
- for assembly plants, electricians, ...




2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V
2 MCBs 16A 3p-C
4 MCBs 16A 1p-B
2m H07RN-F 5G4 with
CEE-plug 32A 5p 400V



portable reel

9134124

1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
4 sockets (DIN 49440)
16A 250V




1 MCB 16A 3p-C
4 MCBs 16A 1p-B
2m H07RN-F 5G4 with
CEE-plug 32A 5p 400V

carrying handle

9134532

1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
4 sockets (DIN 49440)
16A 250V



1 MCB 16A 3p-C
2 MCBs 16A 1p-B
1 RCD 63/4/0,03A
2m H07RN-F 5G4 with
CEE-plug 32A 5p 400V


carrying handle

9134518




Series MURAU

- compact design
- high-quality thermoplastic material
- **dimensions: HxWxD = 290x189x114 mm**
- 4 modules
- ready wired for connection
- IP54 splashproof
- for assembly plants, electricians, ...



1 CEE-socket 32A 5p 400V
3 sockets (DIN 49440)
16A 250V




1 MCB 16A 1p-B
1 RCD 40/4/0,03A
2m H07RN-F 5G4 with
CEE-plug 32A 5p 400V

carrying handle

9013330

5 sockets (DIN 49440)
16A 250V



1 RCD 40/4/0,03A
2m H07RN-F 5G2,5 with
CEE-plug 16A 5p 400V


carrying handle

9013042




Series SCHWAZ/LOFER4

- compact design
- high-quality thermoplastic material
- **dimensions: HxWxD = 290x189x114 mm**
- ready wired for connection
- IP54 splashproof
- for assembly plants, electricians, ...



2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V



2m H07RN-F 5G2,5 with
CEE-plug 16A 5p 400V

portable frame

9014010

6 sockets (DIN 49440)
16A 250V




2m H07RN-F 5G2,5 with
CEE-plug 16A 5p 400V

carrying handle

9017050

4 CEE-sockets 16A 5p 400V



2m H07RN-F 5G2,5 with
CEE-plug 16A 5p 400V



carrying handle

9017115

Special designs - available on request!

Thermoplastic insulated distribution boxes – mobile Series HORN

- compact design, with carrying handle
- high-quality thermoplastic material PC/ABS
- **dimensions: HxWxD = 263x246x75mm**
- up to 12 modules under window
- for wall assembly (4 fixing holes) also possible
- ready wired for connection
- IP44 splashproof
- for construction sites, agriculture, domestic, industry, ...

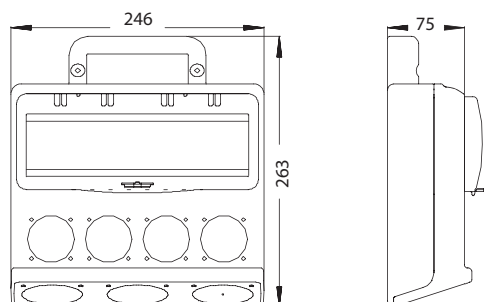


2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

2 MCBs 16A 3p-C
2 MCBs 16A 1p-C
1 RCD 63/4/0,03A

CEE-plug 32A 5p 400V

9004001




1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

1 MCB 16A 3p-C
4 MCBs 16A 1p-C
1 RCD 63/4/0,03A

CEE-plug 32A 5p 400V

9004002

with stand support




2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

2 MCBs 16A 1p-C

CEE-plug 16A 5p 400V

9004004




2 CEE-sockets 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

1 RCD 40/4/0,03A

CEE-plug 16A 5p 400V

9004006



1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
4 sockets (DIN 49440)
16A 250V

1 MCB 16A 3p-C
2 MCBs 16A 1p-C
1 RCD 63/4/0,03A

CEE-plug 32A 5p 400V

9004012



Accessories:
**with stand support
incl. screws**



900404



Thermoplastic insulated distribution boxes – mobile Series IMST




- handy, robust distribution box made of shock-resistant polyamide
- **dimensions: HxWxD = 200x197x197 mm**
- with carrying-handle made of high-grade steel
- maximum rated current of 32A
- up to 7 sockets
- 8 modules under window
- **IP44 splashproof**, ready wired for connection
- for distributing electricity to powered equipment or lighting systems on building sites
- ideal for craft business, the building trades, farmers, etc.
- housing colours: black or red
- stackable, with take-up device for the connecting cable

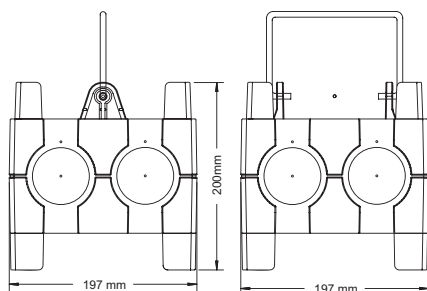

non fused
2 sockets 16A 5p 400V
4 sockets (DIN 49440) 16A 250V

CEE-plug
16A 5p 400V


9030010



non fused
2 sockets 16A 5p 400V
5 sockets (DIN 49440) 16A 250V

2m cable H07RN-F 5G2,5
with CEE-plug 16A 5p 400V


9030020



non fused
7 sockets (DIN 49440) 16A 250V

2m cable H07RN-F 3G2,5
with rubber-plug 16A 250V


9030030



window for 6 modules
2 sockets 16A 5p 400V
4 sockets (DIN 49440) 16A 250V

1 RCD 40/4/0,03A - for all outlets
CEE-plug 16A 5p 400V


9030014



window for 6 modules
2 sockets 16A 5p 400V
4 sockets (DIN 49440) 16A 250V

2 MCBs 16A 1p-C
1 RCD 40/4/0,03A - for all outlets
CEE-plug 16A 5p 400V

9030206




window for 6 modules
2 sockets 16A 5p 400V
5 sockets (DIN 49440) 16A 250V

1 RCD 40/4/0,03A - for all outlets

2m cable H07RN-F 5G2,5
with CEE-plug 16A 5p 400V

9030004


Thermoplastic insulated distribution boxes – mobile Series IMST

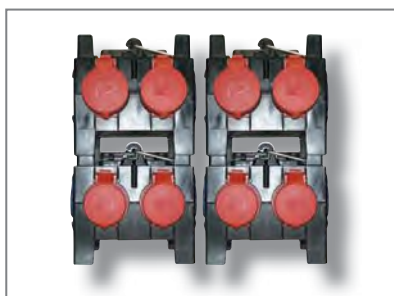

the mobile version can be
stacked space-saving storage




the mobile version has a
take-up device for the
connecting cable




window for 6 modules
2 CEE-sockets 16A 5p 400V
5 sockets (DIN 49440) 16A 250V
2 MCBs 16A 1p-C
1 RCD 40/4/0,03A - for all outlets
2m cable H07RN-F 5G2,5
with CEE-plug 16A 5p 400V

9030204




window for 6 modules
7 sockets (DIN 49440) 16A 250V
1 RCD 40/4/0,03A - for all outlets
2m cable H07RN-F 3G2,5 with
rubber-plug 16A 250V

9030040




window for 8 modules
1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
2 sockets (DIN 49440) 16A 250V
1 MCB 16A 3p-C
1 MCB 16A 1p-C
1 RCD 40/4/0,03A - for all outlets
CEE-plug 32A 5p 400V

9030109




window for 8 modules
1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
3 sockets (DIN 49440) 16A 250V
1 MCB 16A 3p-C
1 MCB 16A 1p-C
1 RCD 40/4/0,03A - for all outlets
2m cable H07RN-F 5G4
with CEE-plug 32A 5p 400V

9030117



window for 8 modules
2 CEE-sockets 16A 5p 400V
2 sockets (DIN 49440) 16A 250V
2 MCBs 16A 3p-C
2 MCBs 16A 1p-C
CEE-plug 32A 5p 400V

9030119



window for 8 modules
2 CEE-sockets 16A 5p 400V
2 sockets (DIN 49440) 16A 250V
2 MCBs 16A 3p-C
2 MCBs 16A 1p-C
2m cable H07RN-F 5G4
with CEE-plug 32A 5p 400V

9030129





Thermoplastic insulated distribution boxes – mobile

Series PEGASUS




without fuse

- handy, robust and compact distribution box made of shock-resistant polyamide
- **dimensions: HxWxD = 230x140x140 mm**
- maximum rated current of 32A
- max. 6 mounting surfaces
- 4 modules under window
- with plastic carrying handle
- anti-tilt bracket as standard with 4 rubber stoppers, can also be used to coil cables
- ready wired for connection
- housing colours: red (standard), yellow (special version)
- suitable for construction sites, workshops, agriculture, domestic, industrial, commercial and for event
- **IP44 splashproof**




4 CEE-sockets 32A 5p 400V
2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V

9034001




4 CEE-sockets 16A 5p 400V
2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034002




2 CEE-sockets 16A 5p 400V
2 sockets (DIN 49440) 16A 250V
2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034003




1 CEE-socket 16A 5p 400V
3 sockets (DIN 49440) 16A 250V
2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034004




8 sockets (DIN 49440) 16A 250V
2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034005




4 sockets (DIN 49440) 16A 250V
2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034006




4 sockets (DIN 49440) 16A 250V
2m cable H07RN-F 3G2,5 with plug (DIN 49440) 16A 250V

9034007




3 CEE-sockets 32A 5p 400V
1 CEE-plug 32A 5p 400V

9034008




3 CEE-sockets 16A 5p 400V
1 CEE-plug 16A 5p 400V

9034009



1 CEE-socket 16A 5p 400V
2 sockets (DIN 49440) 16A 250V
1 CEE-plug 16A 5p 400V

9034010





6 sockets (DIN 49440) 16A 250V
1 CEE-plug 16A 5p 400V

9034011

Thermoplastic insulated distribution boxes – mobile Series PEGASUS

with fuse


- handy, robust and compact distribution box made of shock-resistant polyamide
- **dimensions: HxWxD = 230x140x140 mm**
- maximum rated current of 32A
- max. 6 mounting surfaces
- 4 modules under window
- with plastic carrying handle
- anti-tilt bracket as standard with 4 rubber stoppers, can also be used to coil cables
- ready wired for connection
- housing colours: red (standard), yellow (special version)
- suitable for construction sites, workshops, agriculture, domestic, industrial, commercial and for event
- **IP44 splashproof**



1 CEE-socket 32A 5p 400V
1 CEE-socket 16A 5p 400V
2 sockets (DIN 49440)
16A 250V
1 MCB 16A 3p-C
1 MCB 16A 1p-C

2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V


9034030



2 CEE-sockets 16A 5p 400V
2 sockets (DIN 49440)
16A 250V
1 MCB 16A 3p-C
1 MCB 16A 1p-C

2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V


9034031



1 CEE-socket 16A 5p 400V
2 sockets (DIN 49440)
16A 250V
1 MCB 16A 3p-C
1 MCB 16A 1p-C

2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V


9034032



6 sockets (DIN 49440)
16A 250V
3 MCBs 16A 1p-C

2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V


9034033



3 sockets (DIN 49440)
16A 250V
3 MCBs 16A 1p-C

2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V


9034034



2 CEE-sockets 32A 5p 400V
1 RCD 63A/4/0,03A
all outlets

2m cable H07RN-F 5G4 with CEE-plug 32A 5p 400V


9034050



2 CEE-sockets 16A 5p 400V
1 RCD 40A/4/0,03A
all outlets

2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V


9034051



1 CEE-socket 16A 5p 400V
3 sockets (DIN 49440)
16A 250V
1 RCD 40A/4/0,03A
all outlets

2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034052



6 sockets (DIN 49440)
16A 250V
1 RCD 40A/4/0,03A
all outlets

2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034053



3 sockets (DIN 49440)
16A 250V
1 RCD 40A/4/0,03A
all outlets

2m cable H07RN-F 5G2,5 with CEE-plug 16A 5p 400V

9034054



3 sockets (DIN 49440)
16A 250V
1 RCD 25A/2/0,03A
all outlets

2m cable H07RN-F 3G2,5 with plug (DIN 49440) 16A 250V

9034055




Compact distribution boxes – Series ST. ANTON

PCE compact distribution boxes are designed to be safe, reliable and easy-to-use.

Every product has been manufactured to the highest quality standards (ISO 9001) and is available tailor made in size and equipment to your individual specification.

The wide variety of product features guarantees maximum flexibility in use:

- compact shape made of shock-resistant polyamide
- space saving storage - ergonomic design
- with shackle
- ready wired for connection
- IP44 splashproof
- well adapted for industry.





Entry:

M20 cable gland without cable		9430406
1,5m cable H07RN-F 3G1,5 with rubber plug 16A 250V		9430409
1,5m cable H07RN-F 5G1,5 with CEE-plug 16A 5p 400V		9430429
1 CEE-plug 16A 5p 400V		9430412

Outlet:

3 sockets (DIN49440) 16A 250V with self-closing lid




Entry:

1 CEE-plug 16A 5p 400V		9430402
1 CEE-phase inverter 16A 5p 400V		9430452
1,5m cable H07RN-F 5G1,5 with CEE-plug 16A 5p 400V		9430715
1,5m cable H07RN-F 5G1,5 with CEE-phase inverter 16A 5p 400V		9430719

Outlet:

1 CEE-socket 16A 5p 400V
2 sockets (DIN49440) 16A 250V with self-closing lid



Entry:

1 CEE-plug 16A 5p 400V		9430411
1 CEE-phase inverter 16A 5p 400V		9430453
1,5m cable H07RN-F 5G1,5 with CEE-plug 16A 5p 400V		9430718
1,5m cable H07RN-F 5G1,5 with CEE-phase inverter 16A 5p 400V		9430721

Outlet:

3 CEE-sockets 16A 5p 400V



Entry:

1 CEE-plug 16A 3p 230V

1,5m cable H07RN-F 3G1,5 with CEE-plug 16A 3p 230V

1,5m cable H07RN-F 3G1,5 with CEE-plug 16A 3p 230V

1,5m cable H07RN-F 5G1,5 with CEE-plug 16A 5p 400V

Outlet:

3 CEE-sockets 16A 3p 230V

3 CEE-sockets 16A 3p 230V

2 CEE-sockets 16A 3p 230V
1 socket (DIN49440) 16A 250V

3 CEE-sockets 16A 3p 230V

9430401

9430155

9430455

9430439

Entry:

1 CEE-plug 16A 3p 4h 110V

1 CEE-plug 32A 3p 4h 110V

Outlet:

3 CEE-sockets 16A 3p 4h 110V

3 CEE-sockets 32A 3p 4h 110V

9430301*

9437560*



Entry:

1 CEE-plug 16A 4p 6h 400V

1 CEE-plug 16A 5p 6h 400V

1,5m cable H07RN-F 4x1,5 with CEE-plug 16A 4p 6h 400V

1,5m cable H07RN-F 4x1,5 with CEE-plug 16A 4p 9h 250V

Outlet:

3 CEE-sockets 16A 4p 6h 400V

1 CEE-socket 16A 4p 6h 400V
2 safety sockets 16A 250V belg./french

3 CEE-sockets 16A 4p 6h 400V

3 CEE-sockets 16A 4p 9h 250V

9430311*

9430050*

9430343

9430498



Entry:

1,5m cable H07RN-F 3G1,5 with socket (DIN 49440) belg./french 250V

1 CEE-plug 16A 5p 6h 400V

1 CEE-plug 16A 5p 6h 400V

1,5m cable H07RN-F 5G1,5 with CEE-plug 16A 5p 6h 400V

Outlet:

3 safety sockets 16A 250V belg./french

3 safety sockets 16A 250V belg./french

1 CEE-socket 16A 5p 6h
2 safety sockets 16A 250V belg./french

1 CEE-socket 16A 5p 6h
2 safety sockets 16A 250V belg./french

9430479

9430478

9430477

9430476



Entry:

1,5m cable H07RN-F 2x2,5 with plug 16A 2p 24V

1,5m cable H07RN-F 2x2,5 with plug 16A 2p 42V

Outlet:

3 low voltage sockets 16A 2p 24V

3 low voltage sockets 16A 2p 42V

9430024

9430350



Compact distribution boxes – Series ST. ANTON 4f

Entry:

1,5m cable H07RN-F 5G4 with CEE-plug 32A 5p 6h 400V

1 CEE-plug 32A 5p 6h 400V

1,5m cable H07RN-F 5G4 with CEE-phase inverter 400V

1 CEE-phase inverter 32A 5p

Outlet:

3 CEE-sockets 32A 5p 6h 400V

3 CEE-sockets 32A 5p 6h 400V

3 CEE-sockets 32A 5p 6h 400V

3 CEE-sockets 32A 5p 6h 400V

9437113

9437413

9437114

9437454



* Export version (in Austria and Germany not allowed!)



Thermoplastic insulated empty distribution box – wall mounting **Series T-BOX**



Series T-BOX 4

- dimensions: HxWxD = 217x141x105mm
- windows up to 4 modules
- IP65 watertight

1519004

pack.unit: 32



Series T-BOX 8

- dimensions: HxWxD = 217x235x105mm
- windows up to 8 modules
- IP65 watertight

1519008

pack.unit: 16



Series T-BOX 12

- dimensions: HxWxD = 217x307x105mm
- windows up to 12 modules
- IP65 watertight

1519012

pack.unit: 12



Series T-BOX 26

- dimensions: HxWxD = 409x307x150mm
- windows up to 26 modules
- IP65 watertight

1519026

pack.unit: 5



Series T-BOX 42

- dimensions: HxWxD = 563x326x150mm
- windows up to 42 modules
- IP65 watertight

1519042


pack.unit: 4

Thermoplastic insulated empty distribution box – wall mounting **Series M-BOX**

■ ■ **Series M-BOX:**

- high-quality thermoplastic material
- IP65 watertight
- window up to 6, 8 or 13 modules
- many combination possibilities of housings and sockets without mechanical use
- numerous equipment

■ ■ **Example:**

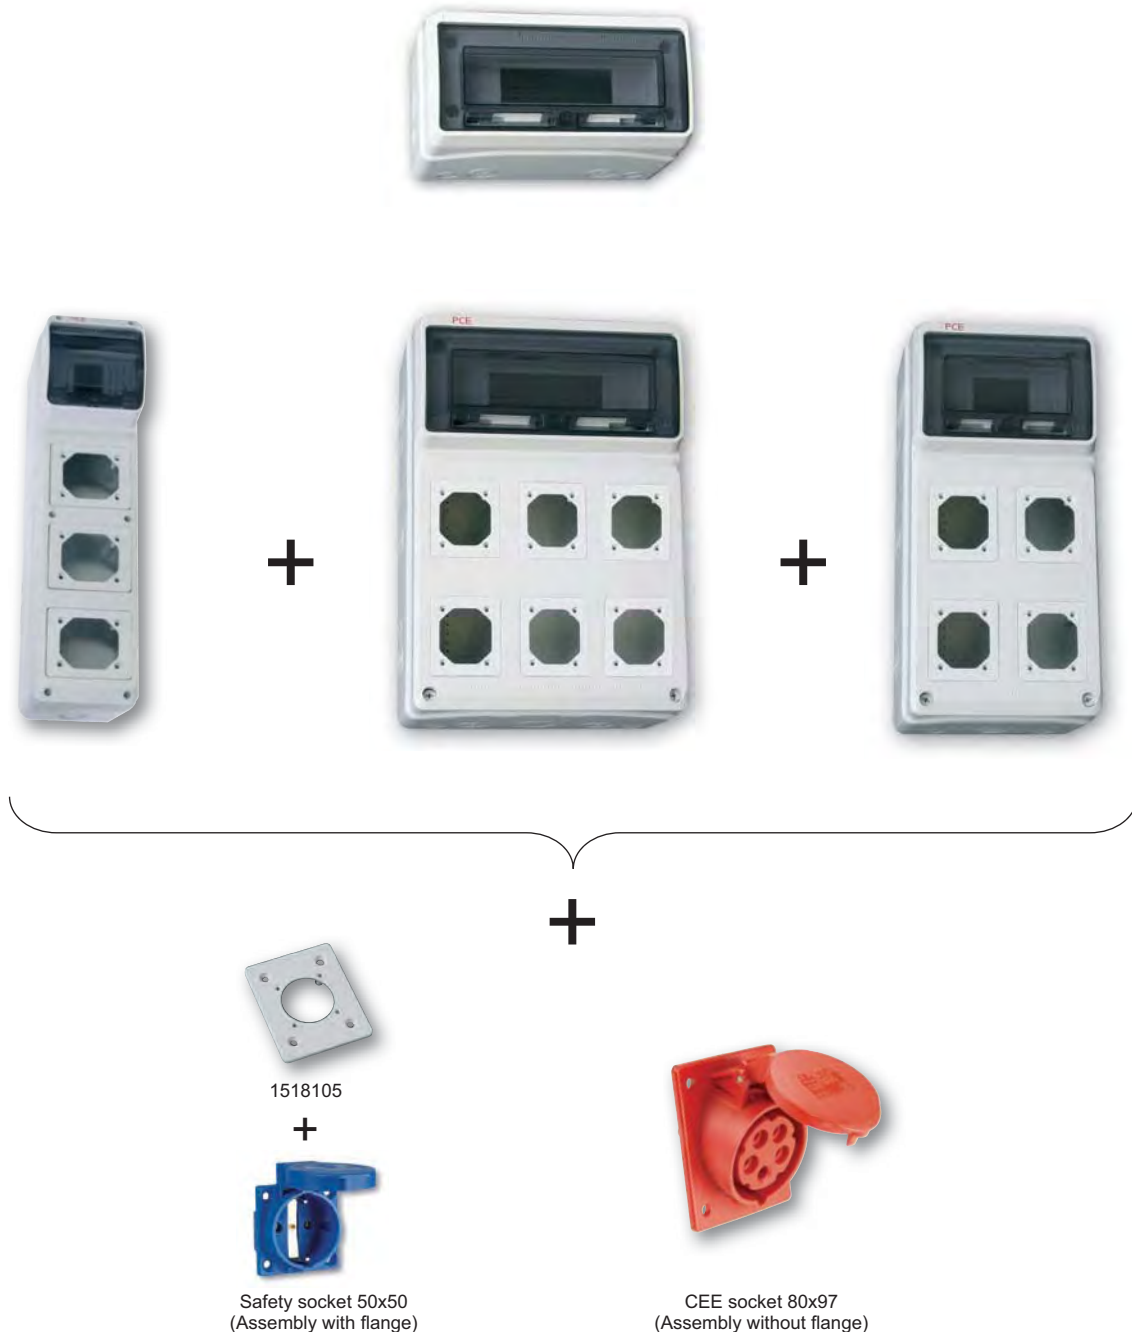

Thermoplastic insulated empty distribution box – wall mounting **Series M-BOX**

■ ■ Included in every box:

- housing with window
- flanges (premounted) for sockets flange 70x85
- 1 blind flange
- instruction manual
- screws for the mounting of the sockets
- 4 caps for wall fixing screws
- **IP65** (depending of the equipped sockets)

Series M-BOX 6S

- **dimensions:** HxWxD=490x125x107mm
- windows up to 6 modules
- 3 perforations only for PCE sockets
- 3 flanges premounted (for assembling sockets 70x85)
- without flange: for assembling sockets 16A 3p up to 32A 5p

For sockets and accessories see page 281!



1518063

pack.unit: 18

Series M-BOX 6E

- **dimensions:** HxWxD=490x125x107mm
- windows up to 6 modules



1518062

pack.unit: 18

Series M-BOX 8S

- **dimensions:** HxWxD=506x230x150mm
- windows up to 8 modules
- 4 perforations only for PCE sockets
- 4 flanges premounted (for assembling sockets 70x85)
- without flange: for assembling sockets 16A 3p up to 32A 5p

For sockets and accessories see page 281!



1518083

pack.unit: 6

Series M-BOX 8E

- **dimensions:** HxWxD=506x230x150mm
- windows up to 8 modules



1518082

pack.unit: 6

Series M-BOX 13S

- **dimensions:** HxWxD=506x330x150mm
- windows up to 13 modules
- 6 perforations only for PCE sockets
- 6 flanges premounted (for assembling sockets 70x85)
- without flange: for assembling sockets 16A 3p up to 32A 5p

For sockets and accessories see page 281!



1518133

pack.unit: 4

Series M-BOX 13E

- **dimensions:** HxWxD=506x330x150mm
- windows up to 13 modules



1518132

pack.unit: 4

Thermoplastic insulated empty distribution box – wall mounting **Series M-BOX**

	16A 3p=6h 230V~	16A 4p=6h 400V~	16A 5p=6h 400V~	32A 3p=6h 230V~	32A 4p=6h 400V~	32A 5p=6h 400V~
	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.	Cat.No.
IP44	413-6f8	414-6f8	415-6	423-6	424-6	425-6
IP67	4132-6f8	4142-6f8	4152-6f78	4232-6f78	4242-6f78	4252-6f78

Technical details and other clock positions see page 82-83

	Cat.No.	Cat.No.
rear connection	Austrian/ German system 1050-0b	Belgian/ French system 1040-0b
side connection	1050-0bs	1040-0bs

Special versions see page 150 to 159!



Series M-BOX 13WH

- dimensions:
WxHxD=180x330x150mm
- windows up to 13 modules (6 units are blinded)

1518134
pack.unit: 12




Blind flange

1518000
pack.unit: 6




Flange for sockets 70x85

1518413
pack.unit: 6




Flange for safety sockets 50x50

1518105
pack.unit: 6




Connecting device

1518010
pack.unit: 10




Wall fixing center

1518020
pack.unit: 10



Metal lock for window

1518030
pack.unit: 1



Terminal block 14p

1518040
pack.unit: 1



Terminal block 14p incl. holder (for input of a second terminal block)

1518045
pack.unit: 1

