

ACQUA

WEATHERPROOF LUMINAIRE | LUMINARIA ESTANCA





ACQUA

Weatherproof luminaire for professional use with modern aesthetics, designed for easy installation and maintenance.

DESCRIPTION

- **Housing** in compressed glass fibre reinforced polyester in grey (RAL 7035) integrating two gear tray holders to allow suspension.
- Transparent **diffuser** in polycarbonate (PC) or acrylic (SAN), with UV protection, manufactured in injection with prismatic design.
- **Gear tray** manufactured in white lacquered steel plate.
- Plastic **clips** or optional stainless steel clips.

PRODUCT OPTIONS

- Special Voltages: 220 V 50/60 Hz; 240 V 50 Hz; 110 V 50/60 Hz.
- Through wiring: 3x1,5 mm²; 3x2,5mm²; 5x1,5 mm²; 5x2,5 mm².
- Fast connector.
- Emergency kit (Ta 0 to 40°C).
- Presence sensor.
- Dimmable ballast.
- Compact: A luminaire for two T5 lamps in the enclosure of one, making it one of the smallest weatherproof luminaires.

MOUNTING OPTIONS

Surface or pendant mounting.

ACCESSORIES

- Reflector in polished aluminium (MIRÓ 4).
- Steel wire 2m with hook and express fastener.

ACQUA

Luminaria estanca para el uso profesional con una estética moderna y práctica a la hora de instalar o realizar su mantenimiento.

DESCRIPCION

- **Carcasa** de poliéster reforzado con fibra de vidrio, fabricada por compresión en color gris (RAL 7035) integrando dos soportes para la fijación de la bandeja, que al mismo tiempo, permiten suspenderla.
- **Difusor** transparente de policarbonato (PC) o acrílico (SAN), con protección UV, fabricado por inyección con prismática.
- **Bandeja** en chapa de acero lacada en blanco.
- **Clips** plásticos o clips opcionales en acero inox.

OPCIONES DE PRODUCTO

- Tensiones especiales: 220 V 50/60 Hz; 240 V 50 Hz; 110 V 50/60 Hz.
- Cableado continuo: 3x1,5 mm²; 3x2,5 mm²; 5x1,5 mm²; 5x2,5 mm².
- Conector rápido.
- Kit de emergencia (Ta 0 a 40°C).
- Sensor de presencia.
- Reactancia regulable.
- Compact: Versión de dos lámparas T5 en la envoltura de una lámpara. Es una de las luminarias estancas de menores dimensiones.

OPCIONES DE MONTAJE

Fijación en superficie o suspendida.

ACCESORIOS

- Reflector de aluminio brillante (MIRÓ 4).
- Sirga de acero de 2m con gancho y fijador express.



IP66



RoHS

PC


IK08 850°C

SAN

IK03 650°C

Ta -5° to +40°C

ACQUA

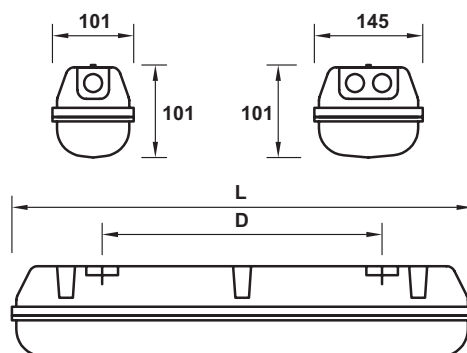

ACQUA T5 PC

	Code / Código		Code / Código	
	E		E	E Compact
1x14W	10048390	2x14W	10038093	10038995
1x24W	10048392	-	-	-
1x28W	10048394	2x28W	10038102	10038996
1x54W	10048396	2x54W	10038119	10047926
1x35W	10048398	2x35W	10038106	10038997
1x49W	10048400	2x49W	10038117	10047927
1x80W	10048402	-	-	-

ACQUA T5 SAN

	Code / Código		Code / Código	
	E		E	E Compact
1x14W	10048389	2x14W	10038092	10038998
1x24W	10048391	-	-	-
1x28W	10048393	2x28W	10038101	10038999
1x54W	10048395	2x54W	10038118	10047928
1x35W	10048397	2x35W	10038105	10039000
1x49W	10048399	2x49W	10038116	10047929
1x80W	10048401	-	-	-

ACQUA T8 PC

	Code / Código		
	E	K	L
1x18W	10038067	10038068	10038069
1x36W	10038077	10038081	10038082
1x58W	10038086	10038090	10038091
2x18W	10038097	10038098	10038099
2x36W	10038110	10038114	10038115
2x58W	10038123	10038127	10038128

ACQUA T8 SAN


	Code / Código		
	E	K	L
1x18W	10038064	10038065	10038066
1x36W	10038074	10038075	10038076
1x58W	10038083	10038084	10038085
2x18W	10038094	10038095	10038096
2x36W	10038107	10038108	10038109
2x58W	10038120	10038121	10038122

DIMENSIONS | DIMENSIONES


							KG		
	L	D					E	K	L
1x14/18/24W*	665	390	1	670x105x75	294	0,0053	1,42	1,69	1,72
1x28/36/54W*	1282	800	1	1287x105x75	147	0,0101	2,43	2,79	2,75
1x35/49/58/80W*	1578	110	1	1583x105x75	147	0,0125	2,94	3,54	3,52
2x14/18/24W	665	390	1	670x155x75	210	0,0078	2,72	3,49	3,42
2x28/36/54W	1282	800	1	1287x155x75	105	0,0149	3,23	4,09	4,02
2x35/49/58W	1578	1100	1	1583x155x75	105	0,0184	3,93	5,31	5,23

* Also compact version. / También versión compact.

LIGHT DISTRIBUTION | DISTRIBUCIÓN DE LA LUZ



ACQUA 254 PC + REFLECTOR



ACQUA 254 PC

OPTIONAL ACCESSORY | ACCESORIO OPCIONAL



2m steel wire with zinc plated steel snap hook and express fastener made of Zamak |
Sirga de 2m de acero con gancho de acero cincado y fijador express de Zamak

10103049

zalux

light evolution

Zalux, S.A.
Ctra. Madrid, Km. 315,7 - Planta 1ª - Local P2
Centro Empresarial Miralbuena
50012 ZARAGOZA (Spain)
Tel (+34) 976 46 22 00
Fax (+34) 976 77 40 61
comercialexp@zalux.com
www.zalux.com



Empresa perteneciente al grupo TRILUX
ZALUX is a part of the TRILUX group